

82E291 - CHANNEL AMPLIFIER EDGE CONNECTOR

From: 82E291


To: 611G/V/E Mother Board

No	Description	No	Description
1	NP	34	RC13 Input from VCA o/p (82E13 p24)
2	+48v	35	NP
3	NP	36	RC13 Control. VCA to routing
4	NP	37	RC14 Control. SF to routing
5	NP	38	NP
6	SW1 48V ON	39	IC 10 Output to routing pan pot
7	Mic Input -	40	Keyway
8	Mic Input +	41	RC14 Input from SF o/p (82E294 p47)
9	SW1 0v - 48v Switch	42	NP
10	NP	43	NP
11	NP	44	NP
12	0v	45	IC 11 Input. Odd Routing Buffer
13	0v	46	NP
14	-18v	47	NP
15	+18v	48	NP
16	IC 8 Input -) From Phase	49	IC11 Output to odd routing switches
17	IC 8 Input +) switch	50	NP
18	RC4 Control. Input Mute	51	IC 12 Input. Even Routing buffer
19	NP	52	Channel into Meters Send
20	NP	53	IC12 Output to even routing switch
21	NP	54	NP
22	NP	55	Line Input
23	Ch Input to phase reverse switch	56	NP
24	RC2 Control. Line i/p select	57	Line Input
25	RC1 Control. Mic i/p select	58	NP
26	RC3 Signal. Subgroup Input	59	
27	RC3 Control. Subgroup i/p select	60	
28	IC 8 Output to Split switch	61	
29	Insert Return - to T5	62	NP
30	NP		
31	IC9 Output to EQ switching (82E312)		
32	Insert Return + to T5		
33	NP		

T82E291.50

Dec 1987

1-19a

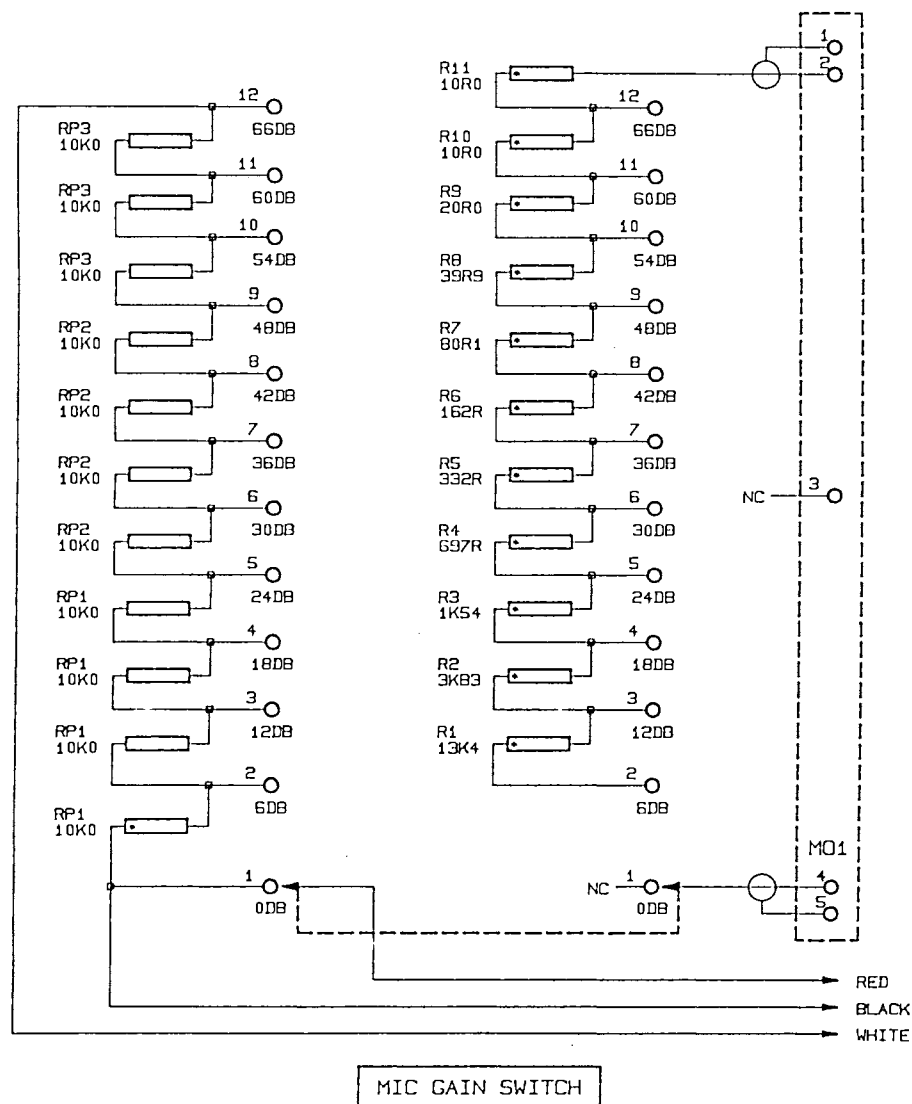

COPYRIGHT ©SSL. ALL RIGHTS RESERVED.
THIS DOCUMENT MAY NOT BE REPRODUCED IN
ANY FORM WITHOUT THE WRITTEN PERMISSION
OF SOLID STATE LOGIC.

REV	ISSUE	DATE	DETAILS
0	A	24 MAY 69	NEW DRAWING A.M. STEFF


SHEET 1 OF 1

REF T82295.71 A3

TITLE
611
MIC GAIN SWITCH

DRG. NO.
T82295.71

Solid State Logic

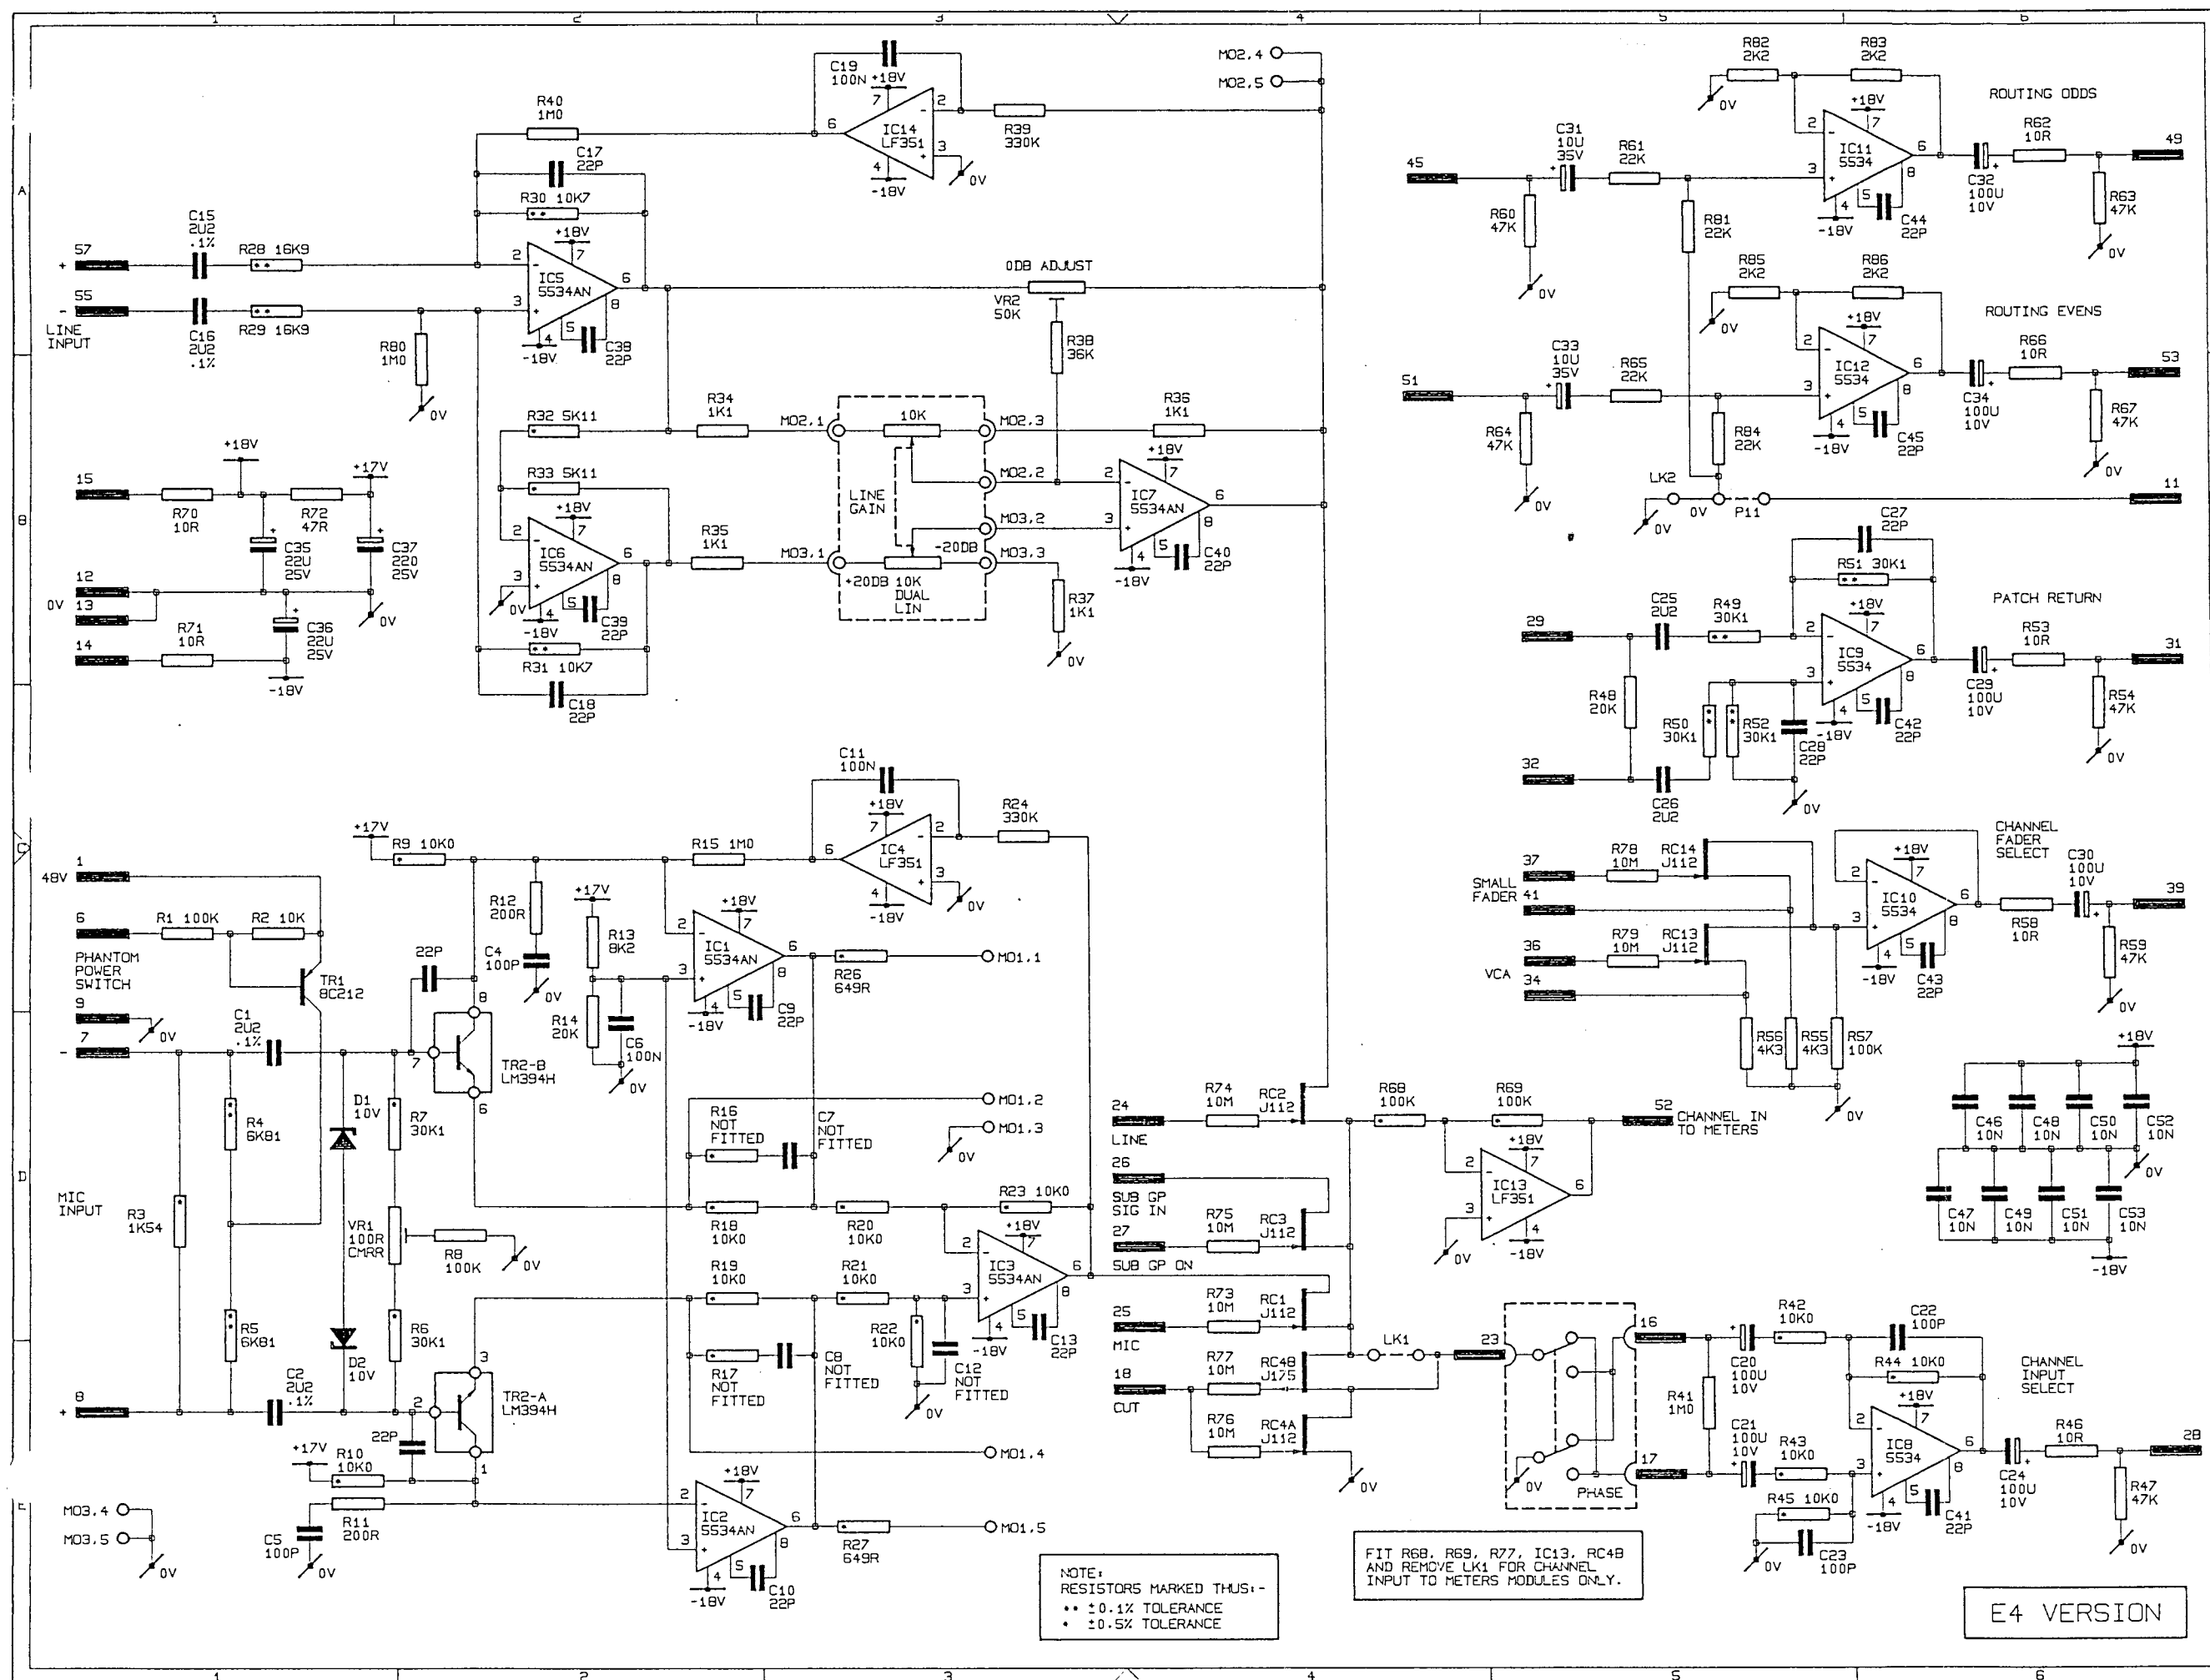

COPYRIGHT © S.S.L. ALL RIGHTS RESERVED. THIS DOCUMENT MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN PERMISSION OF SOLID STATE LOGIC.			
REV	ISSUE	DATE	DETAILS
0	A	5 JULY 93	NEW DRAWING
MM			
SHEET 1 OF 1			
REF: T82291.71.4			
TITLE: 611E/V/G TRANSFORMERLESS CHANNEL AMPS			
DRG. NO.: T82291.71.4			
Solid State Logic			